

AXIUM 5000

AXIUM 5000 | Outdoor flood- and spotlights



- Hard-to-reach areas (for example: facades, roof top billboards)
- Illumination of billboards (of up to 3 m height)
- Flood light applications
- Security lighting
- Facade and building illumination

Product benefits

- Slim and sleek design
- Optimal operation thanks to integrated heat sink
- Flexible positioning
- Stirrup bracket for up to 180° tilting
- Tested quality
- Dust and water protection according to IP67
- Long lifetime thanks to LED technology
- Lower maintenance costs

Product features

- Durable and energy-saving LED luminaire
- Material: Die-cast aluminum
- Type of protection: IP67



Technical data

Electrical data


Operating mode	Electronic control gear (ECG)
Nominal wattage	60.00 W
Mains frequency	50...60 Hz

Light technical data

Luminous flux	4900 lm
---------------	---------

Dimensions & weight

Length	310.0 mm
Height	336.0 mm
Depth	80.0 mm

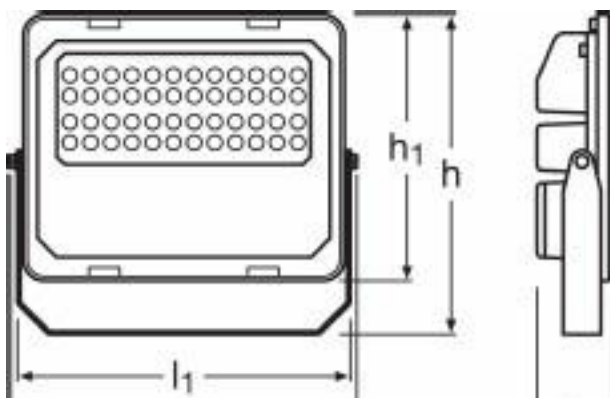

Product line drawing

Colors & materials

Body material	Aluminum
Product color	Black

Lifespan

Lifespan	50000 h
----------	---------

Additional product data

Number of lighting outlets	1
Equipment	LED

Capabilities

Type of installation	Screws
Type of connection	Cable/Connector

Certificates & standards

Protection class	insulation class I (protective earthing)
Type of protection	IP67

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.